Fohhn
colors of sound

Datasheet

EasyPort FP-22 modular

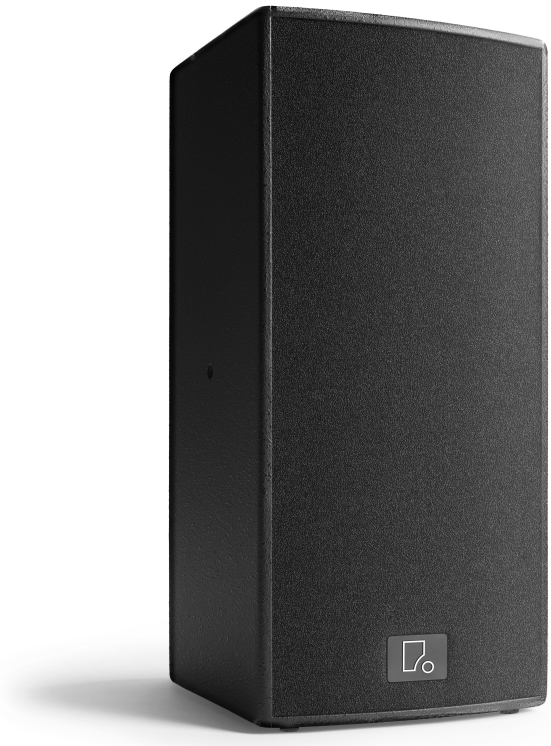

EasyPort FP-22 modular

EasyPort FP-22 is a mobile, battery-powered speaker for high-quality, wireless transmission of speech and music. As the world's first professional battery box, it set standards 30 years ago – and today, in its new version, it is still an icon. It's ready to go in just two minutes – no technical knowledge, power cables, or micro cables required. With an integrated 4-channel mixer, optional Bluetooth receiver, and space for professional wireless systems, it offers maximum freedom for every application. Ideal for presentations, in educational institutions, at public events and speeches, and as a reliable backup solution when the fixed installation fails.

- Up to two 9.5" wireless systems can be integrated (e.g., Sennheiser EWDX, EWD, XSW, or Shure QLDX, SLDX, BLX24R), see accessories
- Optional Bluetooth receiver for pairing with smartphones, etc.
- Excellent speech intelligibility and natural sound
- Suitable for indoor and outdoor use, rain cover available
- Perfectly matched 8“/1” speakers with short horn
- Integrated 4-channel mixer with 2-band tone control
- Processor-controlled 60 W amplifier with high efficiency
- Up to 20 hours of use on a single battery charge
- Maximum sound pressure level 117 dB
- Output for passive additional speaker (FP-22 passive)

Available with the following color options

Black

Equipped with the following Fohhn technologies

Special colors optional

For detailed information about all Fohhn technologies, color options and connections, please visit **www.fohhn.com/en/technologies**

Technical data

Electroacoustic features	
acoustic design	active, battery-powered loudspeaker system 2-way, vented design
components	8" / 1" compression driver with short horn
maximum SPL	117 dB
operational mode	active, battery or AC power operation, Class-H
frequency range	65 Hz – 20 kHz
nominal dispersion (h × v)	100° × 100°

Physical features	
enclosure	multiplex birch plywood
dimensions (w × h × d)	approx. 240 × 510 × 270 mm
speaker stand pole	integral, ø 36 mm
weight	approx. 13.5 kg
standard colors	black (RAL 9005), white (RAL 9016)
handles	1 handle
front design	acoustic foam
mounting points	2 × M8 thread for U-bracket

Optional features	
special colors	RAL Classic / NCS / Pantone on request
wireless microphone system	built-in 1 – 2 × 9.5" wireless receiver
Bluetooth	Integrated Bluetooth receiver with USB and SD slot

Electronic features	
amplifier power	60 W
EQ	bass, treble (shelving)
processor function	autolimiter / subsonic automatic proximity filter

Connections	
output for FP-22 passive	Speakon NL-4
12V output	12V DC out for external equip., pin ø 2,1 mm
outputs (for recording or stacking)	2 × line RCA jacks / 600 ohms, 1 × XLR sym.
phantom power	12 volts
mixer inputs	2 × ext. mic sym. 2 kOhm, 1 × int. wireless mic 10 kOhm, 2 × line RCA 10 kOhm, 1 × line XLR sym.
line outputs	XLR socket
line inputs	2 × RCA, stereo sum to mono

Power supply	
230 V AC	integrated power supply for recharging, IEC cable
fuse	1A MTR (5 × 20 mm)
rechargeable battery	12 V / approx. 7.2 Ah
operation time approx. (speech / music)	8 – 20 hours

power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range, with speaker preset
frequency range: -10 dB under anechoic halfspace-conditions with speaker preset
weight: net weight without optional equipment
nominal dispersion: -6 dB compared to the main dispersion axis

Fohhn Audio AG
Großer Forst 15
72622 Nürtingen
Germany

Phone +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
contact@fohhn.audio

Engineered and made in Germany

Fohhn Audio AG reserves the right to make changes to its product design and technology without notice. All information is subject to change.
© 2026, Fohhn Audio AG, Germany.

Document version: 2026-01-29 12:29:28